

FIG. 1 is a perspective view of a device 100 in an open position. The device 100 includes a housing 110 and a lid 112. The housing 110 includes a top surface 114 and a bottom surface 116. The lid 112 includes a top surface 118 and a bottom surface 120. The device 100 is shown in an open position, with the lid 112 hinged to the housing 110. The device 100 includes a display 122 and a control panel 124. The display 122 is located on the top surface 114 of the housing 110. The control panel 124 is located on the bottom surface 116 of the housing 110. The device 100 also includes a speaker 126 and a microphone 128. The speaker 126 is located on the top surface 114 of the housing 110. The microphone 128 is located on the bottom surface 116 of the housing 110. The device 100 is shown in an open position, with the lid 112 hinged to the housing 110. The device 100 includes a display 122 and a control panel 124. The display 122 is located on the top surface 114 of the housing 110. The control panel 124 is located on the bottom surface 116 of the housing 110. The device 100 also includes a speaker 126 and a microphone 128. The speaker 126 is located on the top surface 114 of the housing 110. The microphone 128 is located on the bottom surface 116 of the housing 110.

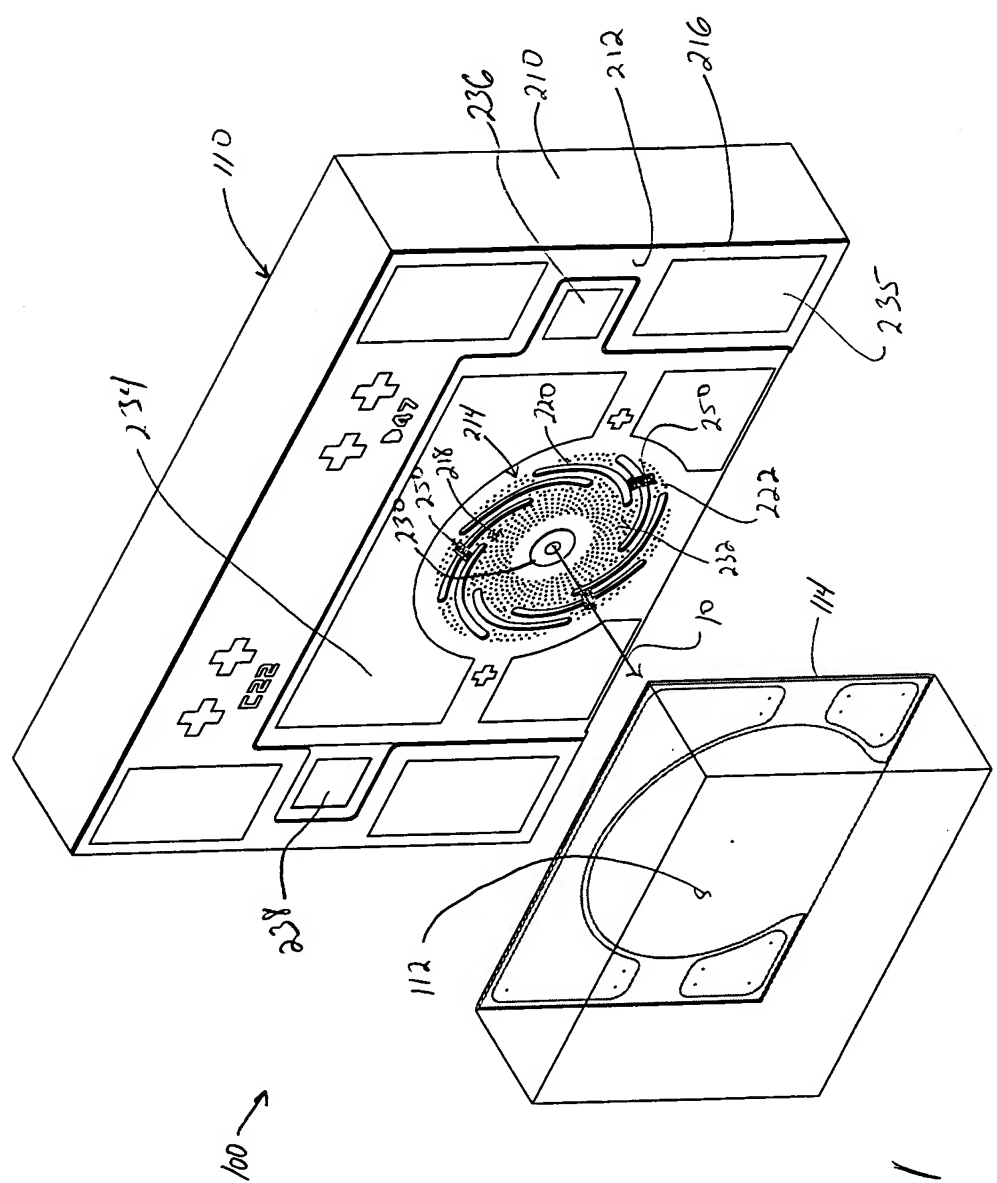


Fig. 1

FIG. 2 is a schematic diagram of a device 110, which includes a display 210. The display 210 shows a central circular region 218, which is surrounded by a ring 240. The ring 240 is divided into segments by radial lines 244 and 246. A dashed line 230 is also shown within the ring 240.

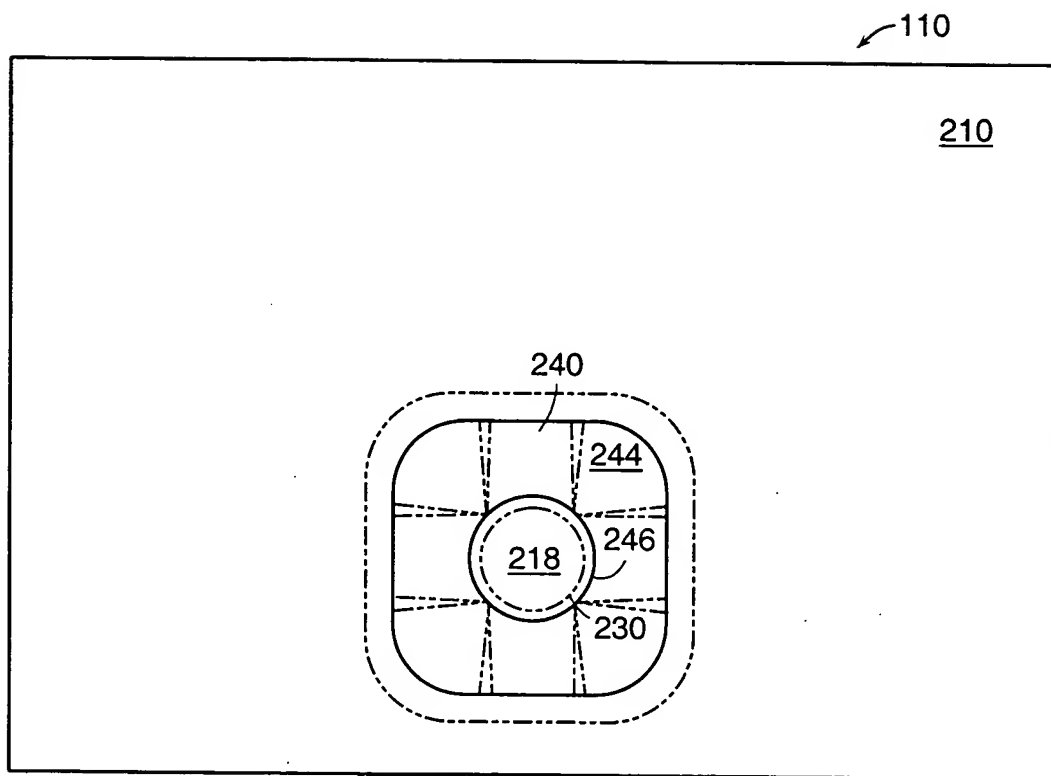


FIG. 2

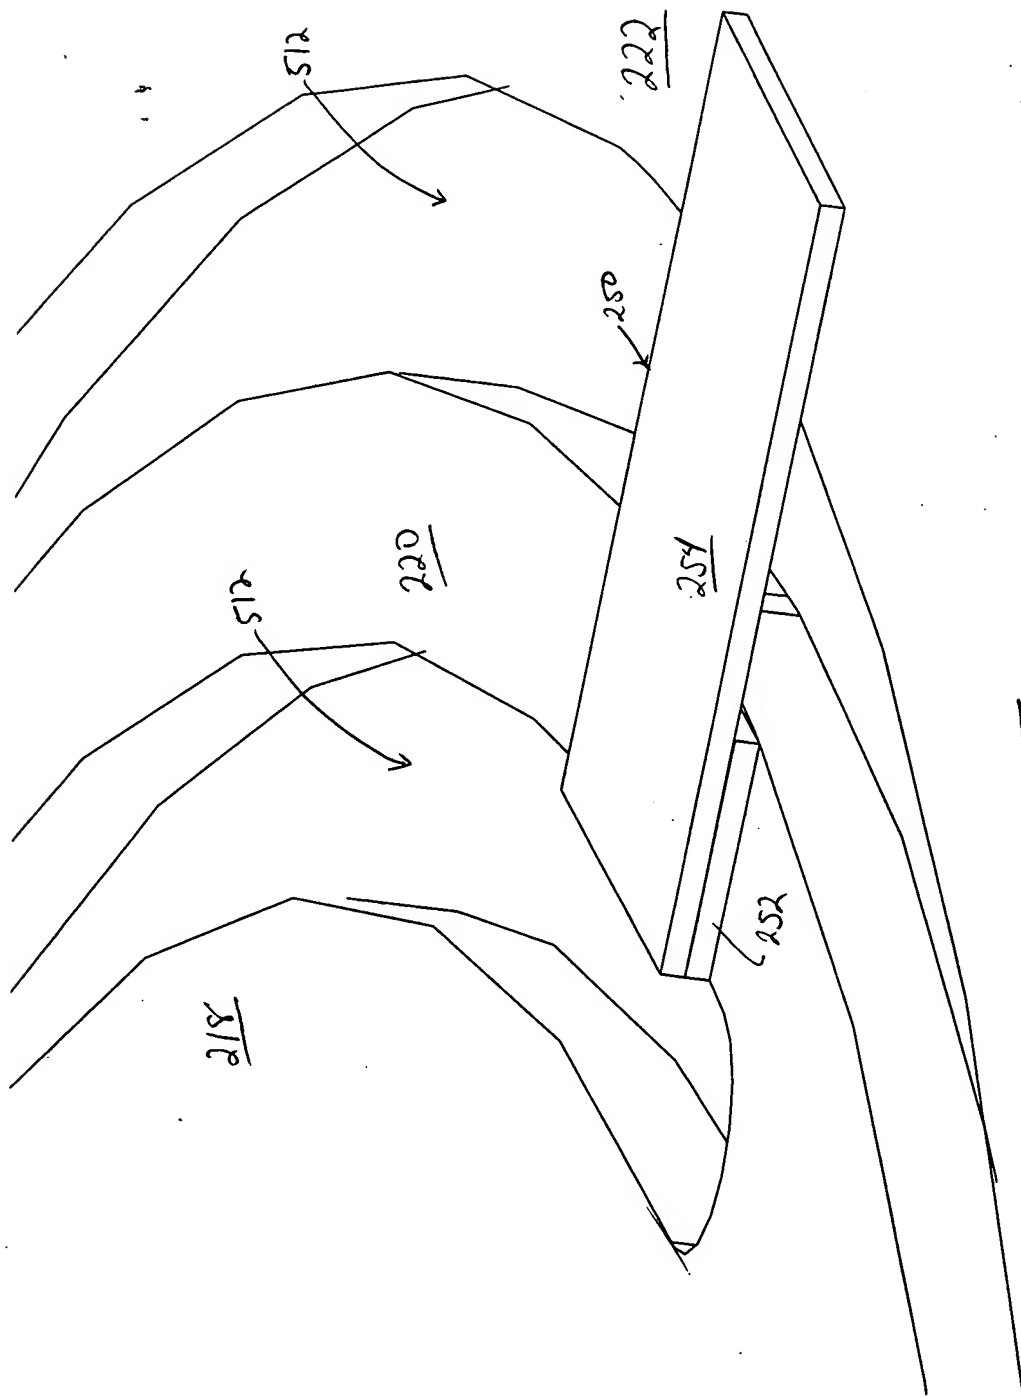


Fig. 3

FIG. 4

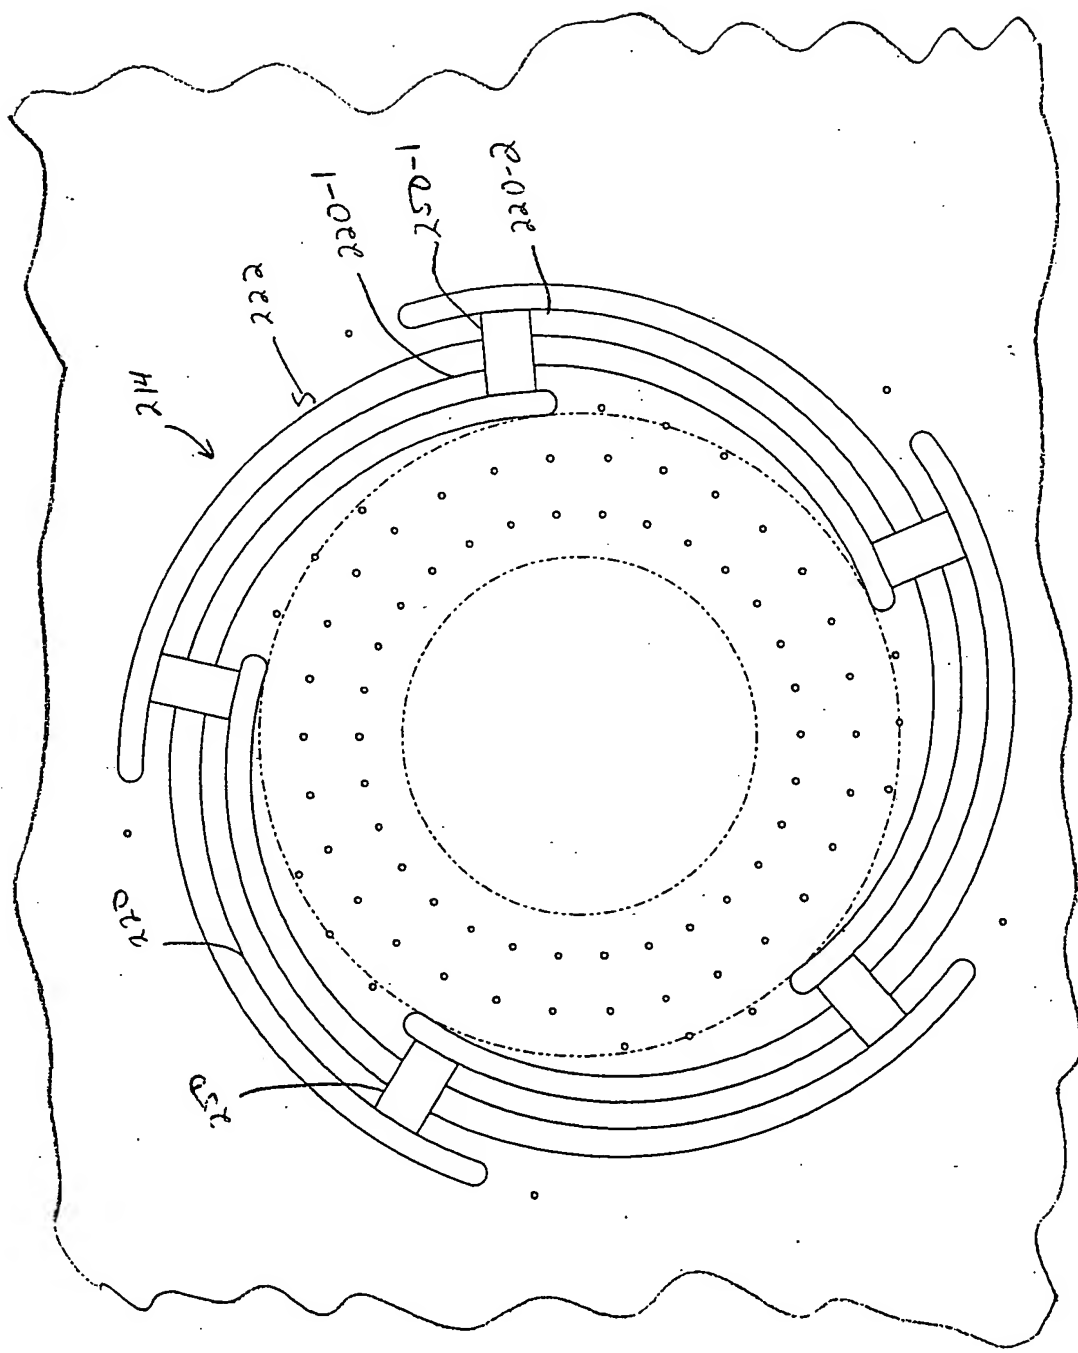


Fig 4

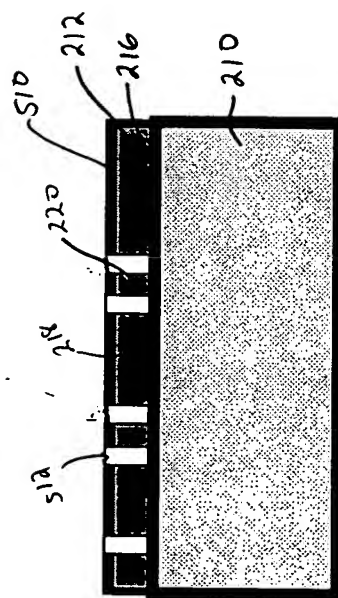


Fig. 5A

1003757 1523700

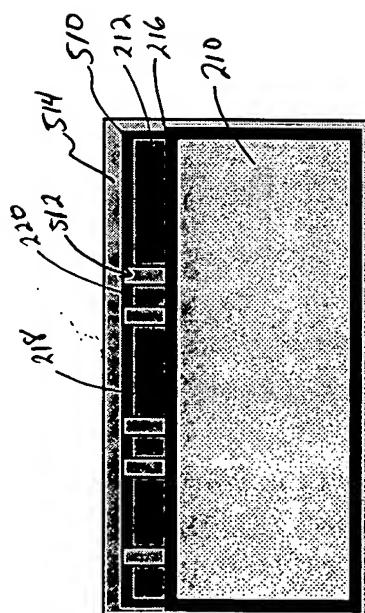


Fig. 5B

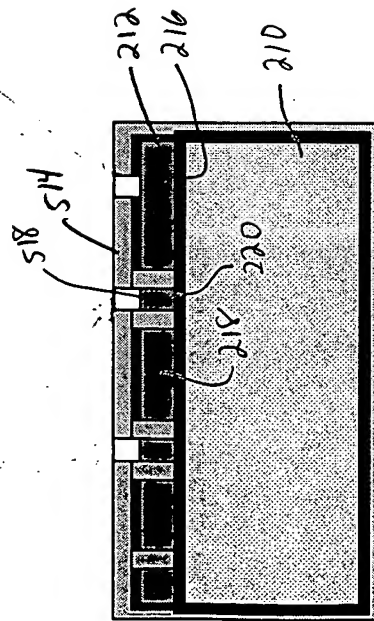


Fig. 5C





FIG. 5E

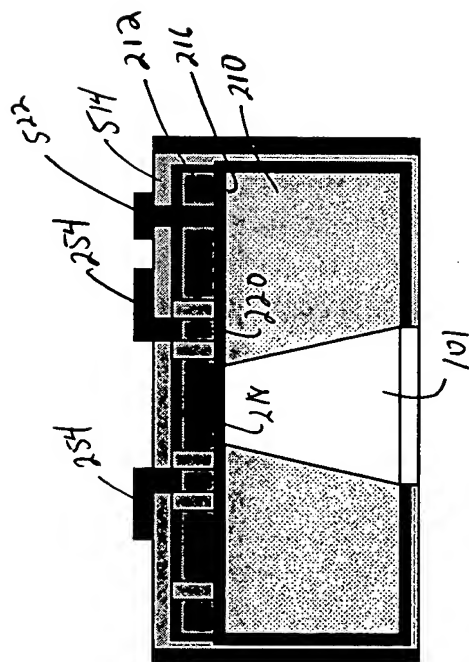


Fig. 5E